


# INSTALLATION INSTRUCTIONS

(\* Instructions suitable for following vehicles:

**TOYOTA** Landcruiser 80 Series, Landcruiser 79 Series, Landcruiser 76 Series, Landcruiser 75 Series.  
**NISSAN** Patrol GU, Patrol GQ. )

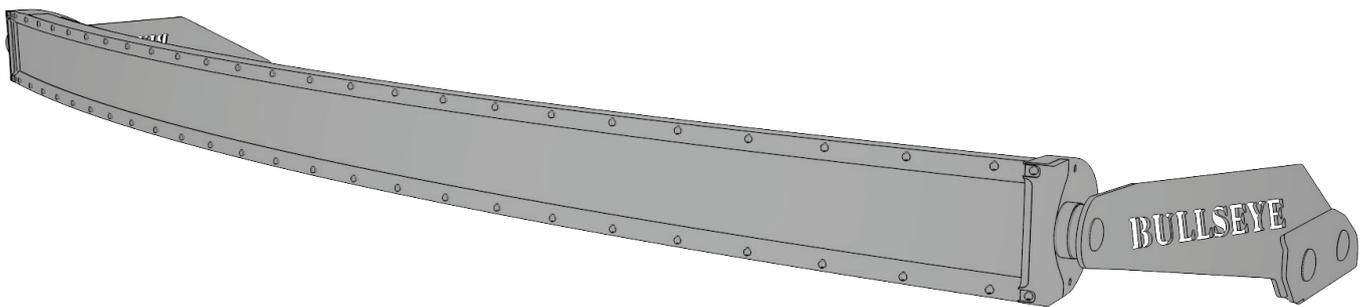


[www.bullseyeproducts.com.au](http://www.bullseyeproducts.com.au)



Document created by Anchor Digital  
[www.anchor-digital.com.au](http://www.anchor-digital.com.au)


## STEP 1

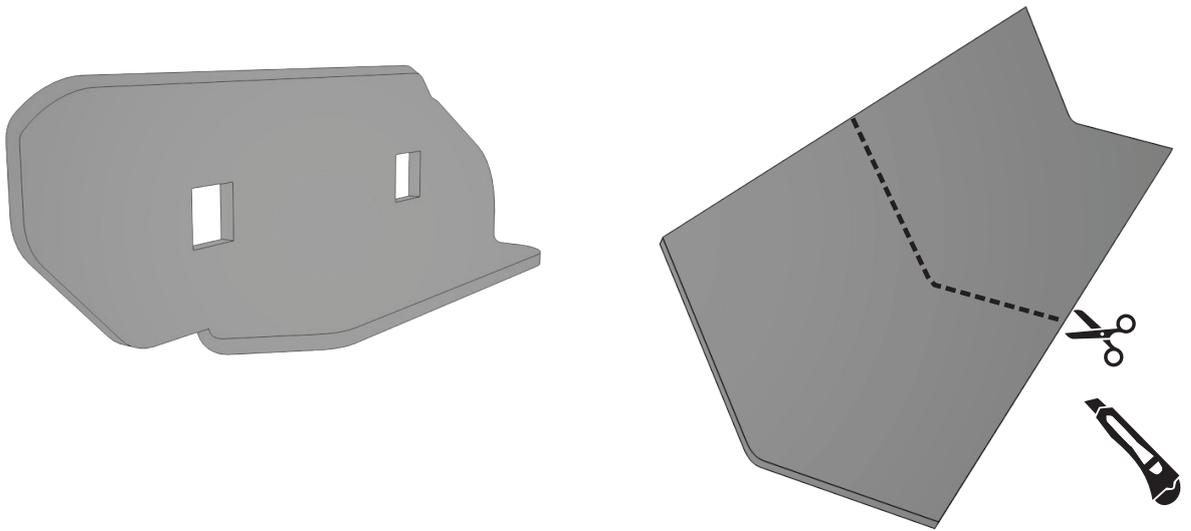

Start by using the sticky backed foam provided and place it on the inside of the small clamps to protect them from scratching the paint on your vehicle.


\*Tip: When cutting foam use razor blade.

## STEP 2

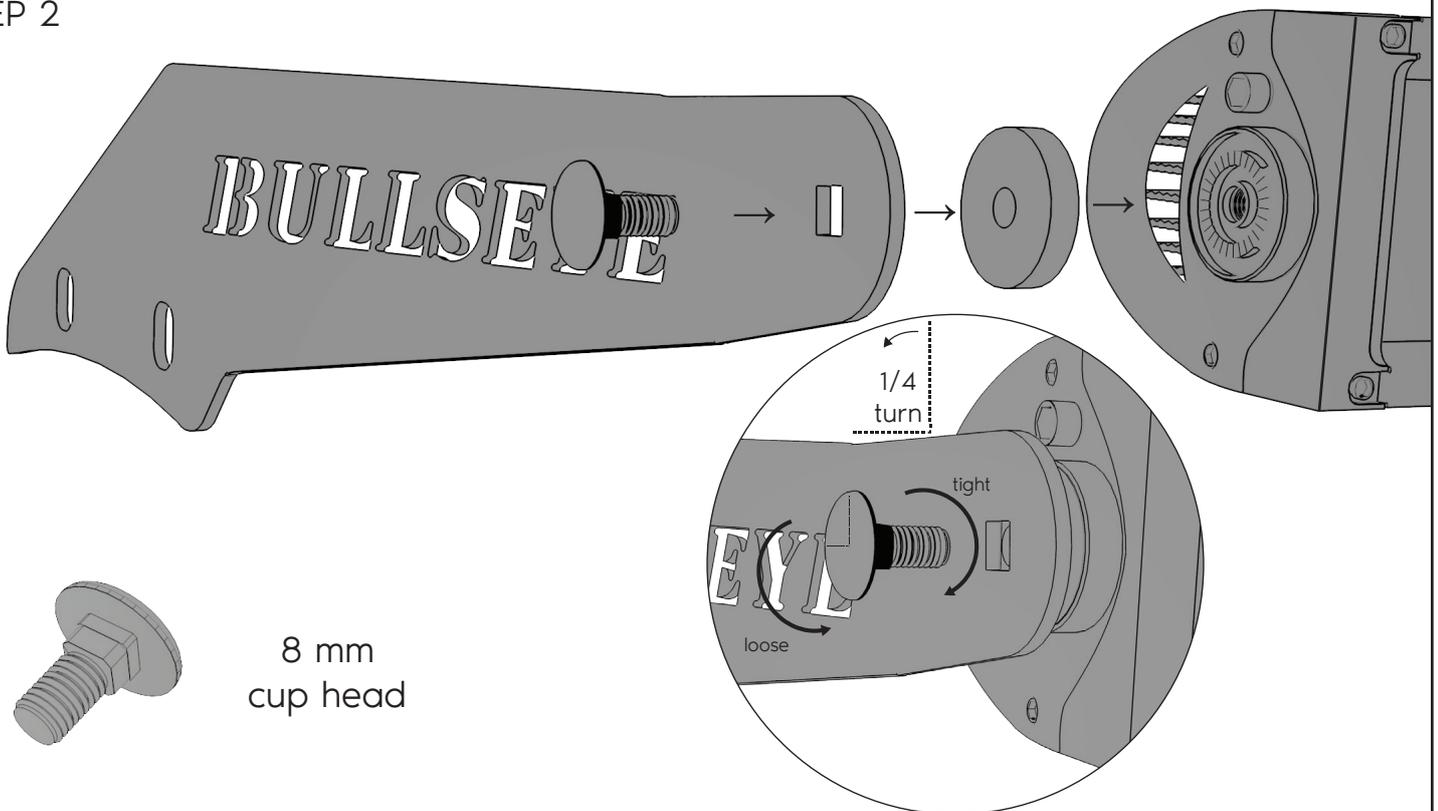


Wind the mounts onto the ends of the light bar, using the 8mm cup head bolts and rubber washers provided.

To adjust the Light bar, unwind the mount and turn bolt 1/4 clockwise or anti-clockwise in the square hole and refit it to the light bar.

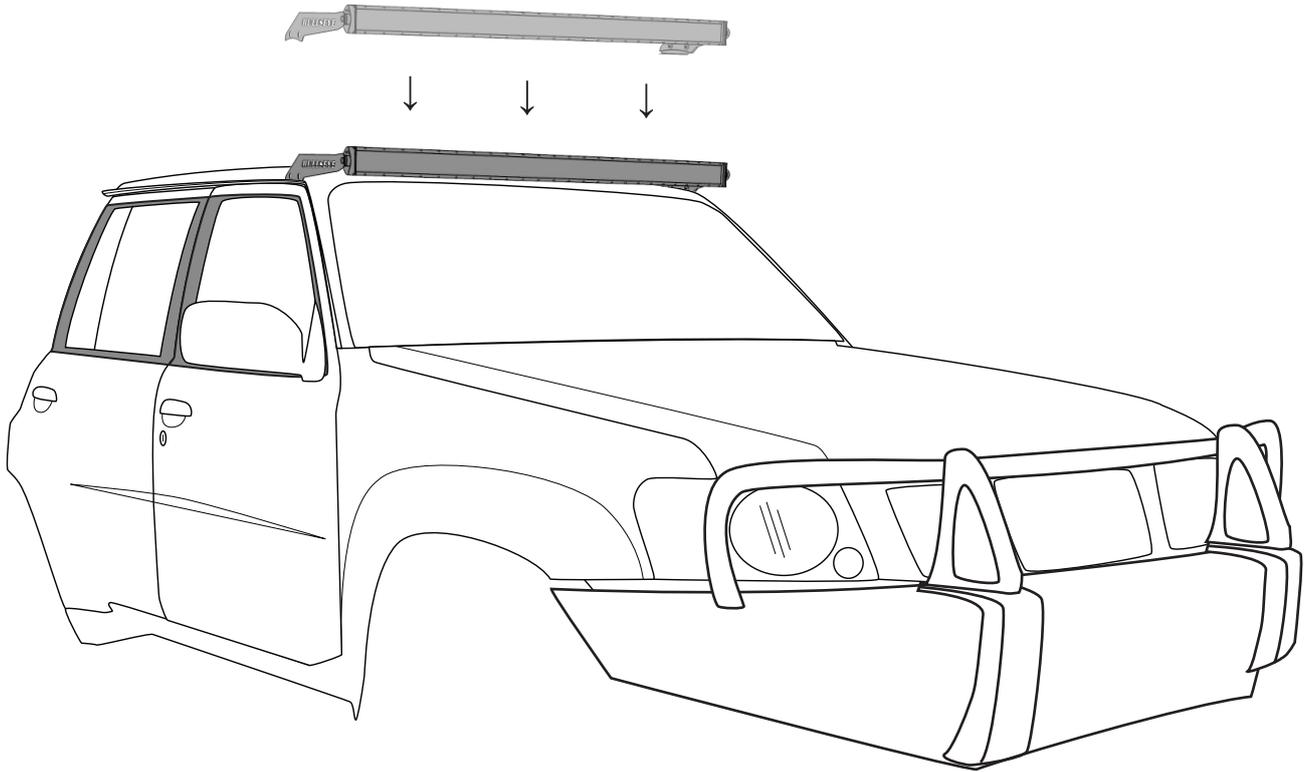


Place light bar into position on top of the windscreen, you will need a spare set of hands to help you hold it up there. Adjust the light to sit horizontally.

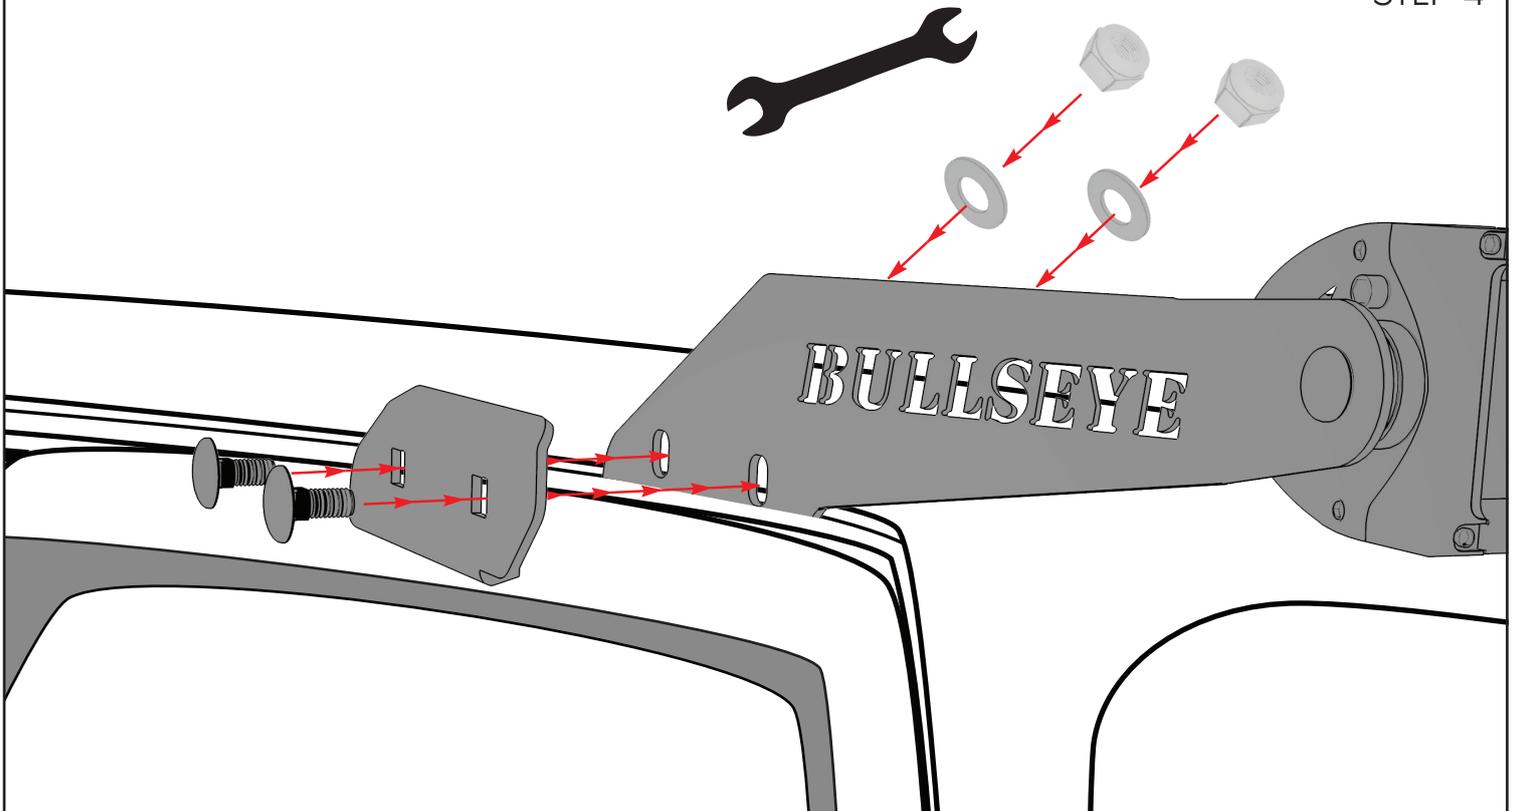

Hold the mount in place on the A Pillar in the gutter, using the 4 x 10mm cup head bolts and rubber washer provided, bolt the clamps onto the gutters and mounts.


## STEP 5

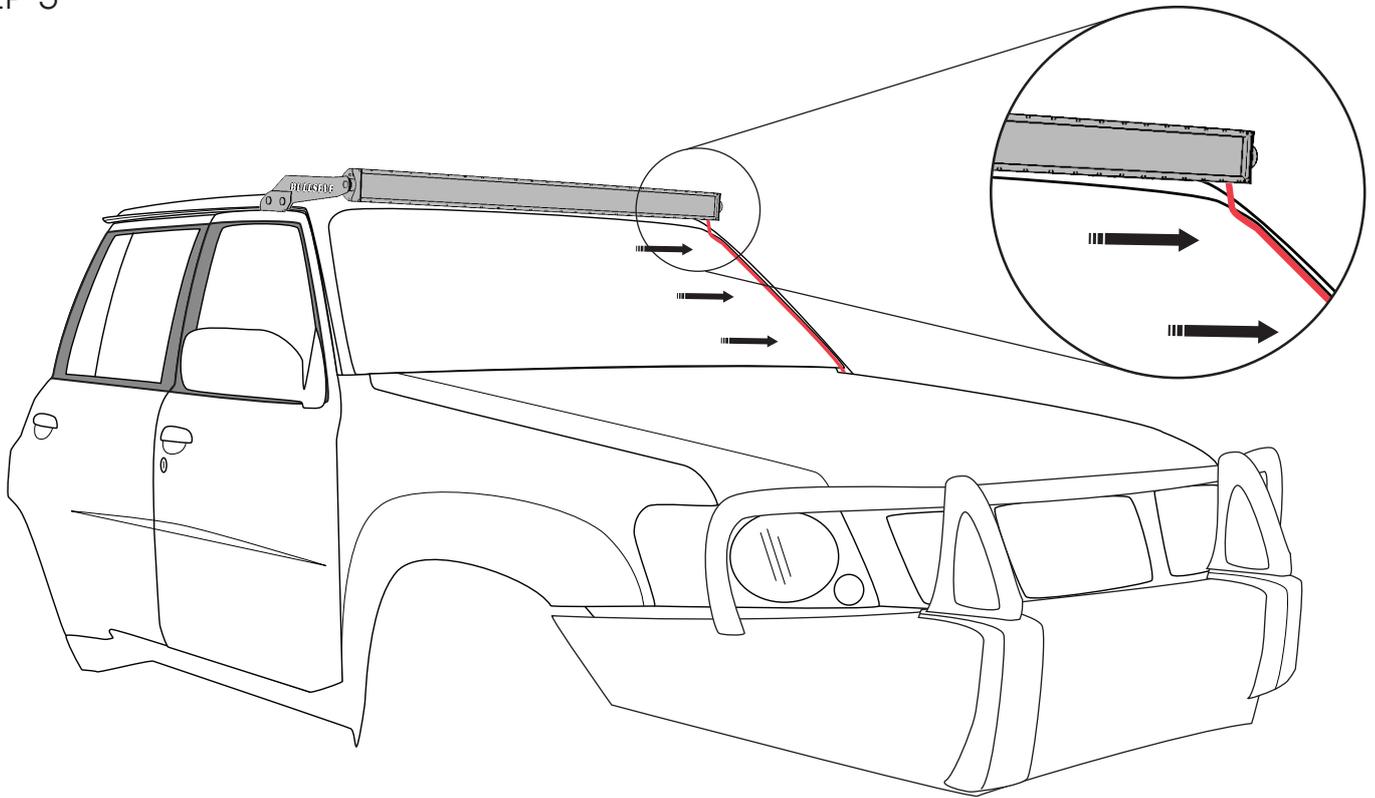

Run the wiring down the side of your windscreen, preferably on the same side as the battery. Use a few dabs of silicone or to hold it in place.

### Note:

There can be some whistling, and it all depends on your bar also. Best thing to do if you get wind noise, is either place some hard compound rubber at intervals in the fins along the rear of the bar, that will suppress the vibration caused by the wind compressing under the bar.

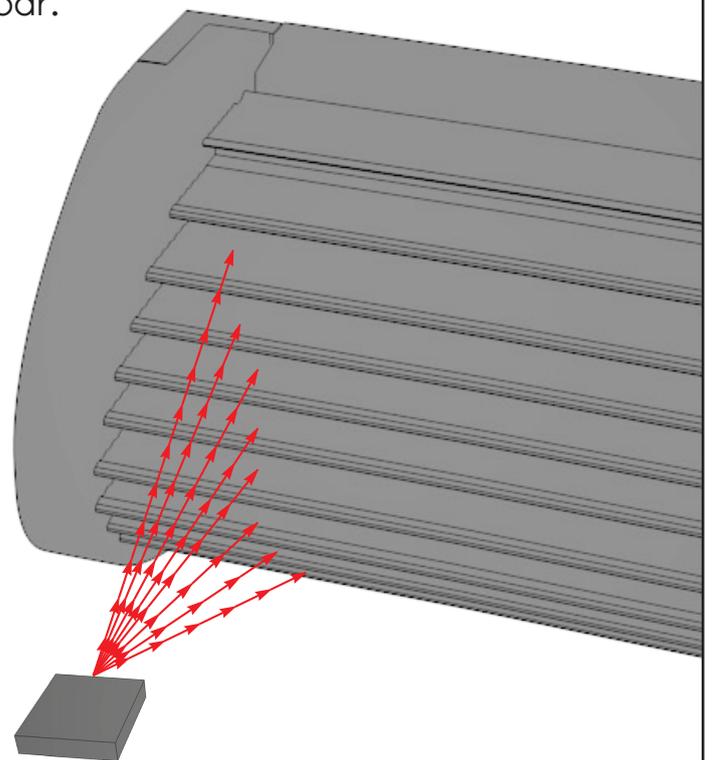

### Suggestion:

Fisheye style optics 3D, 4D, 5D are not recommended as they drop light vertically down from the face of the light bar.